



Quartz - Blend

Technical Data Sheet

Product Information

Dimensions:

Height up to 4200mm
Track Width 100mm/54mm
Track Height 27mm/50mm

Fire Ratings:

N/A

Acoustics:

Up to 55dB (Rw)

Structure:

BS5234; BS6180; BS6399

Joints:

Dry Joint

Corners:

Dry Joint
(90, 135 & T)

Deflection Head:

$\pm 12.5\text{mm}/\pm 25\text{mm}$

Door Options:

Timber Door
Glazed Door
Stile Door
GDS Door

Profiles & Door Frame:

Aluminium

Ironmongery:

A wide range of ironmongery can be supplied with Quartz

Glass Type:

Toughened - Laminated

Glass Thickness:



10-19mm

Options:

Blinds
Manifestations
Graphics
Switch Glass

Finishes:

Polyester Powder Coat
Satin Anodised Aluminium
Special Anodised Finish

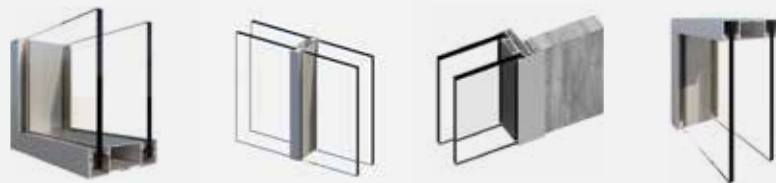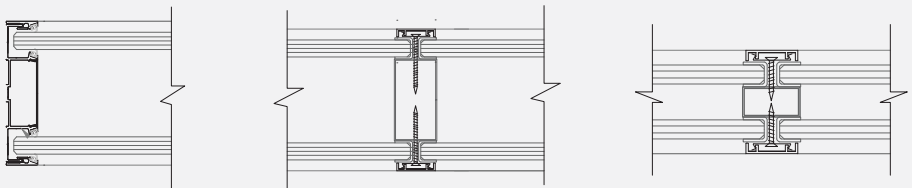

This double glazed system, can be supplied in either 54mm or 100mm, ensuring a high acoustic resistance is achieved.

The integration of mullion posts, enables a seamless transition from glass to timber and back to glass, providing endless design options.

British Standards

- Sound Measurement BS EN ISO 140
- Sound Rating BS EN ISO 717
- Structural Stability BS5234; BS6180; BS6399



Quartz is designed and manufactured by Apton Partitioning Limited in the UK