

Quartz 54

Technical Data Sheet

Product Information

Dimensions:

Height up to 3000mm
Track Width 54mm
Track Height 27mm/50mm

Fire Ratings:

N/A

Acoustics:

Up to 47dB (dB)

Structure:

BS5234; BS6180; BS6399

Joints:

Dry Joint

Corners:

Dry Joint
(90 , 135 & T)

Deflection Head:

±12.5mm

Door Options:

Timber Door
Glazed Door
Stile Door
GDS Door

Profiles & Door Frame:

Aluminium

Ironmongery:

A wide range of ironmongery can be supplied with Quartz54

Glass Type:

Toughened - Laminated

Glass Thickness:


10-12.8mm

Options:

Manifestations
Graphics
Switch Glass

Finishes:

Polyester Powder Coat
Satin Anodised Aluminium
Special Anodised Finish

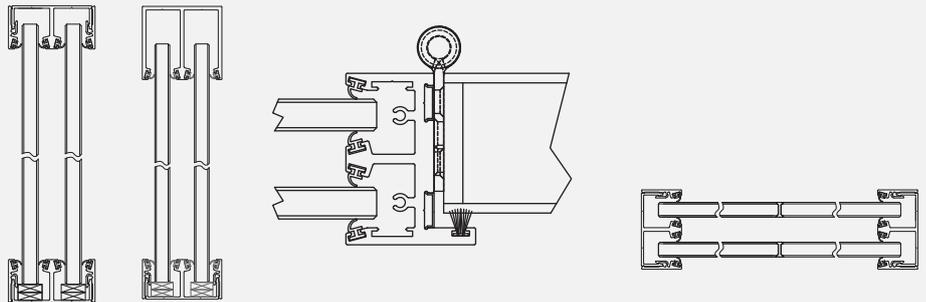

Double glazing for minimal aesthetic with the benefit of high acoustic resistance. Integrated with the Quartz micro door frame and either glass or timber swing doors, the interior designer can achieve the look and performance.

British Standards

- Sound Measurement BS EN ISO 140
- Sound Rating BS EN ISO 717
- Structural Stability BS5234; BS6180; BS6399



Quartz54 is designed and manufactured by Apton Partitioning Limited in the UK